




## 9TYC12



### Double scissor hydraulic lift table (350 kg)

Note : Under no circumstances should you work below a lifted load without having secured it using mechanical supports.

- Allows lifting, lowering and possibly moving heavy loads over short distances.
- Hydraulic lifting by pedal and progressive lowering by joystick allowing the platform to stop at the desired height.
- Easy to move thanks to its chrome hoop.
- 2 swivel and 2 fixed castors, equipped with protection and brakes to stop the rotation of the wheels in case of emergency.
- Made of high strength steel.
- Safety valve built into the hydraulic cylinder to prevent overloading.
- The spacing between the moving parts ensures safety by preventing the user from pinching their fingers.
- Manual dead man's release for optimum safety when lowering.

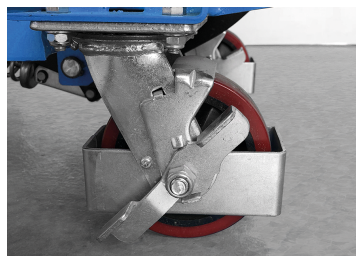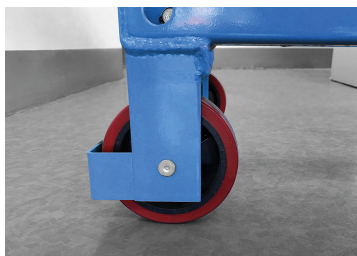

 **9TYC12035AB**

Capacity (kg) : 350

Lift plate dimensions (mm) : 910 x 500 x 52

Minimum Height H1 (mm) : 350

Maximum height H2 (mm) : 1300

H (mm) : 970

Lifting height (mm) :

Max height (mm) :

Overall height (mm) :