



3025

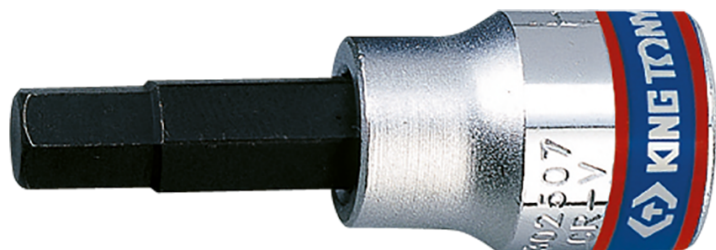

M Inbusschroevendraaierdopsleutel
6-kantig 3/8"

DIN 7422/3120

- S2-behandeld opzetstuk
- Afwerking in gepolijst chroom

	Afmetingen (N° - mm)	L (mm)	Gewicht (g)
302503	3	50	28
302504	4	50	30
302505	5	50	34
302506	6	50	38
302507	7	50	38
302508	8	50	40
302509	9	50	40
302510	10	50	40
302512	12	50	42