




## 75A1

### Eschroefdraadbittens met dop

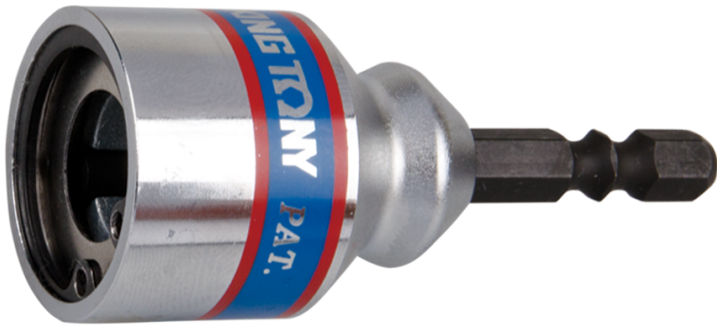

- Mogelijkheid tot installeren van draadstang door vastdraaien of losdraaien
- Automatische blokkering van de schroefdraad
- Beschadigt de schroefdraden niet
- Afwerking in gepolijst chroom

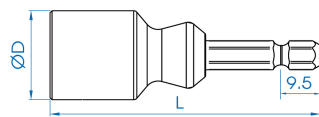

	Bereik (mm)	Afmeting (mm)	Afmetingen (Inch)	ø D (mm)	L (mm)	Gewicht (g)
75A105M	4,6 ~ 5,0	5	3/16"	20	66	60
75A106M	5,6 ~ 6,35	6	1/4"	24	66	75
75A108M	7,6 ~ 8,0	8	5/16"	24	66	74
75A110M	9,0 ~ 10,0	10	3/8"	28	66	99
75A112M	11,4 ~ 12,7	12	1/2"	28	66	98,8
75A114M	14,1 ~ 13,2	14	9/16"	34	66	126,6
75A116M	16,1 ~ 15	16	5/8"	34	66	125,8