



## 9DM1361

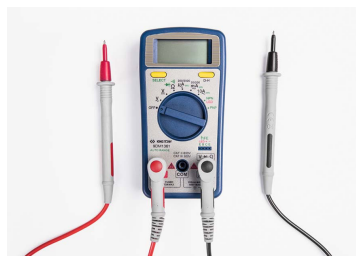

### Digitale multimeter

- Automatische stop
- Automatische selectie van de kalibers
- Laag energieverbruik
- Goedkeuring: CE EN61010-1, 600V CATII, 300V CATIII
- Maximaal weergegeven waarde 1.999
- Negatieve polariteit indicator
- Doorlopende voltmeter (0,1 mV ~ 1V): 200mV / 2V / 20V / 200V / 600V
- Alternatieve voltmeter (0.001V ~ 1V): 2V / 20V / 200V / 600V
- Doorlopend amperemeter (0.1uA ~0.01A) : 200uA / 2000uA / 20mA / 2A / 10A
- Alternatief amperemeter (0.1uA ~0.01A) : 200uA / 2000uA / 20mA / 2A / 10A
- Weerstand (0.1? ~ 0.01M?) : 200? / 2k? / 20k? / 200k? / 2M? / 20M?
- Test LED
- hFE (NPN,PNP)
- Batterij indicator
- LCD scherm
- AAA 1.5V x 2 (inbegrepen)



9DM1361

Afmeting (mm)

138 x 70 x 32

Gewicht (g)

262